


Optionally with extra long screw application

	L	
25 mm	252	other dimensions are identical
50 mm	315	

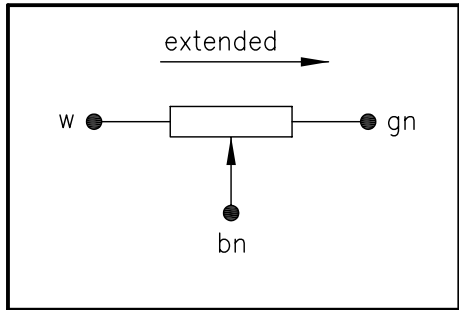

**Caution:** The shielding is not connected to the housing.  
The user has to take care of the correct grounding.

	25 mm	50 mm
L	237	300
L1	120	145
Nominal stroke	25	50
Electr. stroke	27	52
Mech. stroke	29	54
R (kOhm)	1	5
Linearity (independent)	±0.25%	±0.2%

Pos.	Menge	Z.Nummer:	Material:	Behandlung:			
Änderungen:				28-028			
a	Kabel gewechs., 2.97	b	300 war 287, 11.98	c	Kabel 3x0.5mm2, farbcod., 7.04		
d	Masse 28+24.8 gedr. + ausger.	e	Einheits Profil eingeführt 12.09.06 TZ	f			
<b>GENGE &amp; THOMA AG</b> Wegaufnehmer HP 28 CP-SR CH-2543 Lengnau/Biel				gez.: 17.08.95 DM	Masstab: 1:1		
				gepr.:		<table border="1"> <tr> <td>a</td> <td>b</td> <td>c</td> </tr> <tr> <td>d</td> <td>e</td> <td></td> </tr> </table>	a
a	b	c					
d	e						
				28-028E			