


Measuring range	25	50	100	150
Mech. stroke	29	54	104	154
Length L	149.5	174.5	224.5	274.5

Caution: The shielding is not connected to the housing.
The user has to take care of the correct grounding.

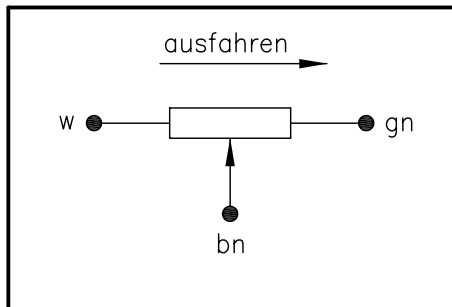

Pos.	Menge	Z.Nummer:	Material:	Behandlung:			
Änderungen:				28-034E			
a	Kabel gewechs., 2.97	b	Kabel 3x0.5mm2, farbcod., 7.04	c			
d		e		f			
GENGE & THOMA AG CH-2543 Lengnau/Biel				gez.: 28.01.99 DM gepr.:	Masstab: 1:1		
				Linear motion transducer (shrouded) HP 28 CP-S		28-034E	<table border="1"> <tr> <td>a</td> <td>b</td> </tr> <tr> <td></td> <td></td> </tr> </table>
a	b						