


# OS-30

c **FA** us (FW2)

Ordering lot : 100pcs./Unit


Pitch (terminal to terminal) : 3.81mm

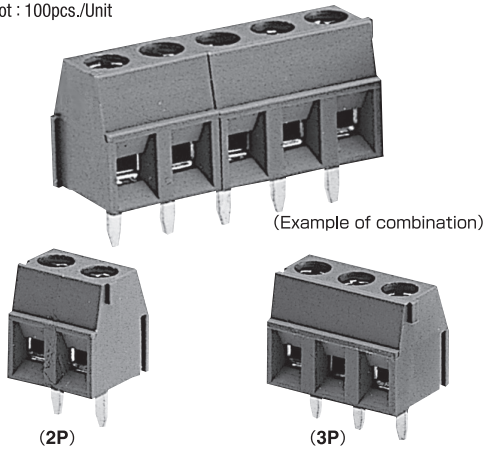

Number of terminals : Number of poles required  
[combination of 2P and 3P]

## Specifications


Electrical Rating	300V, 10A
Insulation Resistance	DC500V, 1000MΩ
Withstanding Voltage	AC2000V
Cable Range	AWG26~16
Wire Strip Length	5~7mm
Storage Temperature Rating	-40°C~+80°C
Usage Temperature Rating	-40°C~+80°C

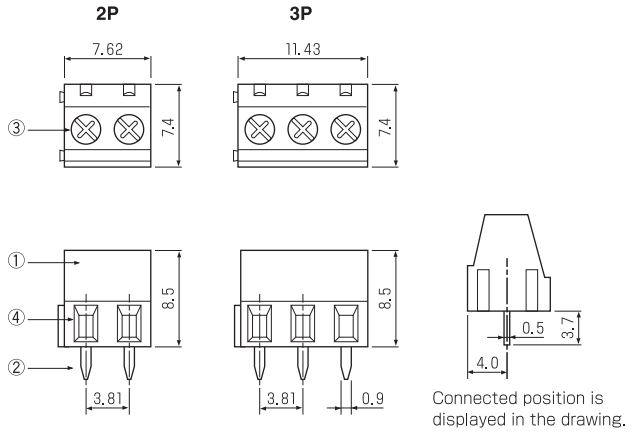

Wire Strip Length



$3.81 \times (P-1)$



## Composition

No.	Part Name	Materials	Flame Class	Treatment	Remarks
①	Base	PA 66	94V-0		Green
②	Terminal	Brass		Sn	
③	Screw (M2×0.4P)	Steel		Cr <sup>3+</sup> Zn	⊕ Screw
④	Contact	Brass		Ni	