


OS-32

FW2

Pitch (terminal to terminal) : 3.81mm

Ordering lot : 100pcs./Unit



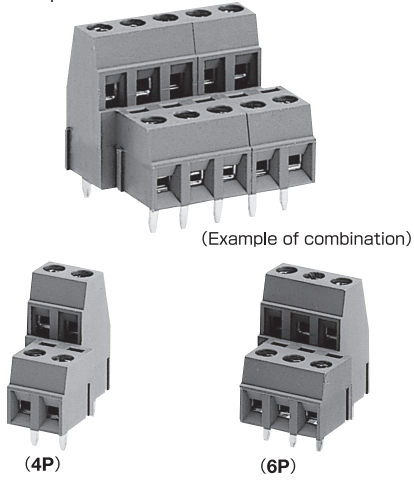


(Example of combination)

(4P)

(6P)

Number of terminals : Number of poles required
[combination of 4P and 6P]

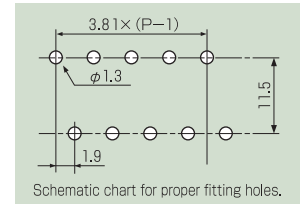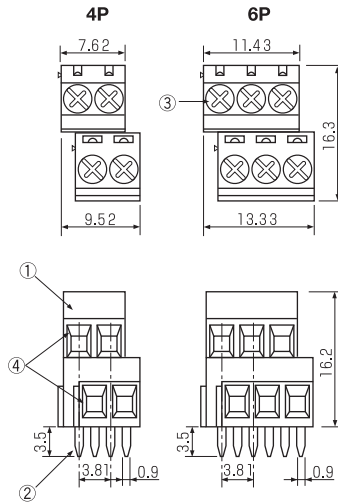

Schematic chart for proper fitting holes.

Specifications

Electrical Rating	300V, 10A
Insulation Resistance	DC500V, 1000MΩ
Withstanding Voltage	AC2000V
Cable Range	AWG26~16
Wire Strip Length	5~7mm
Storage Temperature Rating	-40°C~+80°C
Usage Temperature Rating	-40°C~+80°C

Composition

No.	Part Name	Materials	Flame Class	Treatment	Remarks
①	Base	PA 66	94V-0		Green
②	Terminal	Brass		Sn	
③	Screw (M2×0.4P)	Steel		Cr ³⁺ Zn	⊕ Screw
④	Contact	Brass		Ni	