



# OCN-021

c  us (FW2)

# OCN-022

c  us (FW2)

Pitch (terminal to terminal) : 3.5mm

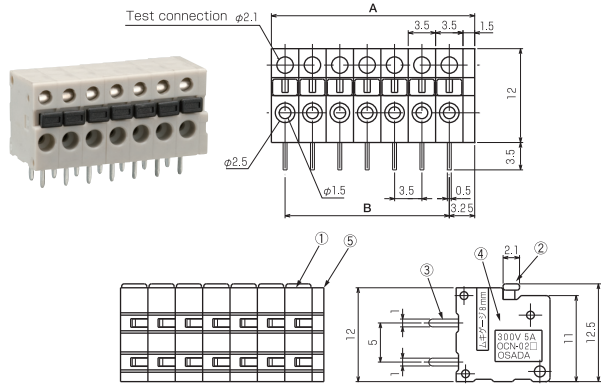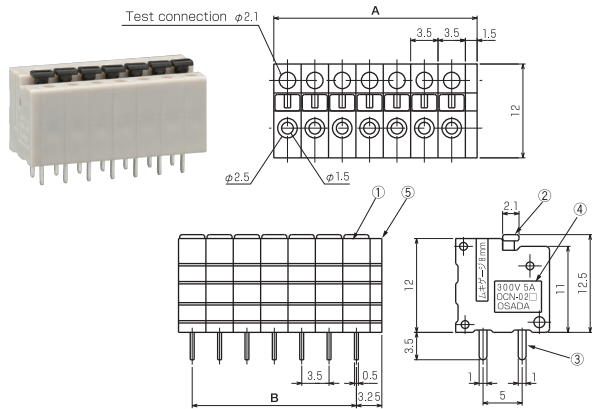

## Specifications

Electrical Rating	150V, 5A(OCN-021) 300V, 5A(OCN-022)
Insulation Resistance	DC500V, 1000MΩ
Withstanding Voltage	AC2000V
Cable Range	SoI/Str AWG26~20
Wire Strip Length	8~9mm
Usage Temperature Rating	-40℃~+80℃

※Gray (Standard Color), 4 colors combination (Blue, Red & Black)

Measurements List of A & B ( P : Number of terminals ) More than 21P are special order products.

P	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
A	5	8.5	12.0	15.5	19.0	22.5	26.0	29.5	33.0	36.5	40.0	43.5	47.0	50.5	54.0	57.5	61.0	64.5	68.0	71.5
B		3.5	7.0	10.5	14.0	17.5	21.0	24.5	28.0	31.5	35.0	38.5	42.0	45.5	49.0	52.5	56.0	59.5	63.0	66.5

## Composition

No.	Part Name	Materials	Flame Class	Treatment	Remarks
①	Base	PA 66	94V-0		Gray
②	Push Button		94V-0		Black
③	Terminal	Brass		Sn	
④	Spring	SUS301			
⑤	Side Plate	PA 66	94V-0		

