


# OCN-070


FW2

PAT

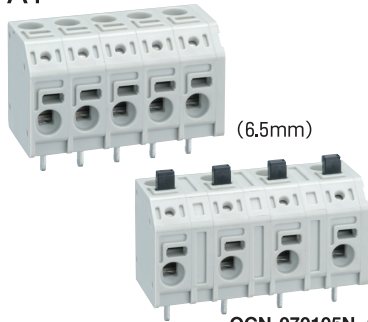


(6.5mm)

OCN-070105N (10.5mm)

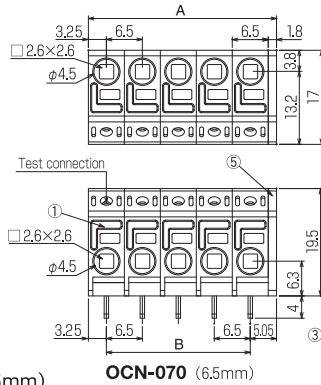

OCN-070 (6.5mm)

Pitch (terminal to terminal) : 6.5mm, 10.5mm

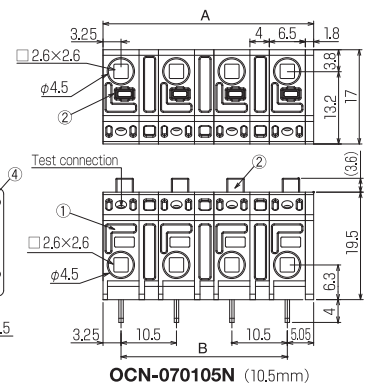

OCN-070105N (10.5mm)

## Specifications

Electrical Rating	300V, 15A
Insulation Resistance	DC500V, 1000MΩ
Withstanding Voltage	AC2500V
Cable Range	AWG26~14
Storage Temperature Rating	-40°C~+80°C
Usage Temperature Rating	-40°C~+80°C

## Composition

No.	Part Name	Materials	Flame Class	Treatment	Remarks
①	Base	PA66	94V-0		※
②	Push Button	Polycarbonate	94V-0		Black
③	Terminal	Brass		Sn	
④	Spring	SUS301			
⑤	Side Plate	PA66	94V-0		※

※Gray (Standard Color), 4 colors combination (Red, Blue & Black)

## Measurements List of A & B (P : Number of terminals)

Pitch	P	1	2	3	4	5	6	7	8	9	10	11	12
6.5mm	A	14.8	21.3	27.8	34.3	40.8	47.3	53.8	60.3	66.8	73.3	79.8	
	B	6.5	13.0	19.5	26.0	32.5	39.0	45.5	52.0	58.5	65.0	71.5	
10.5mm	A	18.8	29.3	39.8	50.3	60.8	71.3	81.8	92.3	102.8	113.3	123.8	
	B	10.5	21.0	31.5	42.0	52.5	63.0	73.5	84.0	94.5	105.0	115.5	

