



OCN-3000

OCN-3000L

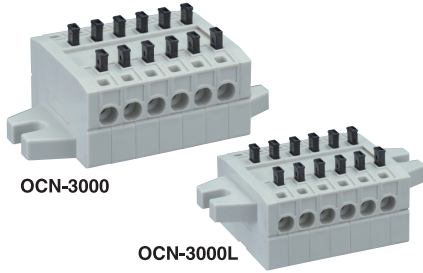

OCN-3000

OCN-3000L

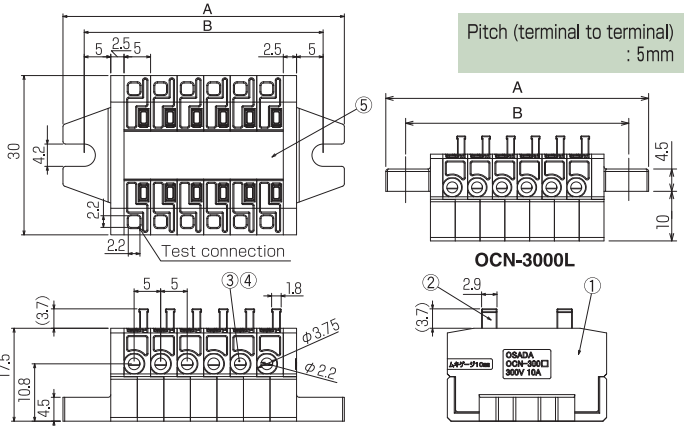

Pitch (terminal to terminal)
: 5mm

※OCN-3000 and OCN-3002 can be combined.

Specifications


Electrical Rating	300V, 10A
Insulation Resistance	DC500V, 1000MΩ
Withstanding Voltage	AC2500V
Cable Range	Sol AWG24~20 (5A) Str AWG22~16 (10A)
Wire Strip Length	10~12mm
Storage Temperature Rating	JIS (-40°C~+80°C) UL (-40°C~+65°C)
Usage Temperature Rating	JIS (-40°C~+80°C) UL (-40°C~+65°C)

※Gray(Standard Color), 3 colors combination(Black, Red & Blue)

Measurements List of A & B(P : Number of terminals) Allowance 2~10P ±0.5 11~20P ±0.8 More than 21P are special order products.

P	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30
A		33	38	43	48	53	58	63	68	73	78	83	88	93	98	103	108	113	118	123										
B		25	30	35	40	45	50	55	60	65	70	75	80	85	90	95	100	105	110	115										

The button can be selected high or low.
Low button adds "S" to the model name
of articles.



Composition

No.	Part Name	Materials	Flame Class	Treatment	Remarks
①	Base	PA66	94V-0		
②	Push Button	Polycarbonate	94V-0		
③	Terminal	Brass		Sn	
④	Spring	SUS301			
⑤	Marking Strip				Option