OCN-3002

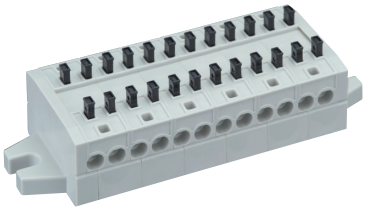

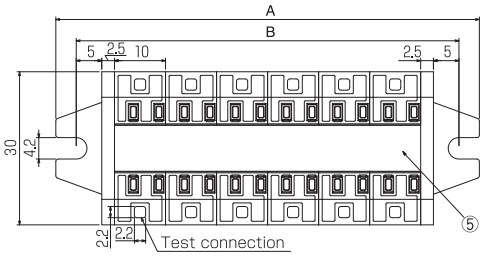

Pitch (terminal to terminal)
: 10mm

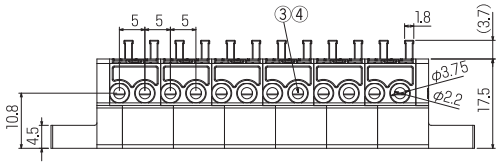



※OCN-3000 and OCN-3002 can be combined.

Specifications

Electrical Rating	300V, 5A (JIS 300V, 10A)
Insulation Resistance	DC500V, 1000MΩ
Withstanding Voltage	AC2500V
Cable Range	Sol AWG24～20 (5A) Sol.Str AWG24～16 (10A)
Wire Strip Length	10～12mm
Storage Temperature Rating	JIS(−40℃～+80℃) UL(−40℃～+65℃)
Usage Temperature Rating	JIS(−40℃～+80℃) UL(−40℃～+65℃)

※Gray(Standard Color), 3 colors combination(Black, Red & Blue)

The button can be selected high or low.
Low button adds "S" to the model name of articles.



Composition

No.	Part Name	Materials	Flame Class	Treatment	Remarks
①	Base	PA66	94V−0		
②	Push Button	Polycarbonate	94V−0		
③	Terminal	Brass		Sn	
④	Spring	SUS301			
⑤	Marking Strip				Option

Measurements List of A & B(P : Number of terminals) Allowance 1～5P ±0.8 6～10P ±1.0 11P～ ±1.5 More than 21P are special order products.

P	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30
A	33	43	53	63	73	83	93	103	113	123	133	143	153	163	173	183	193	203	213	223										
B	25	35	45	55	65	75	85	95	105	115	125	135	145	155	165	175	185	195	205	215										