


OCN-3100N



PAT

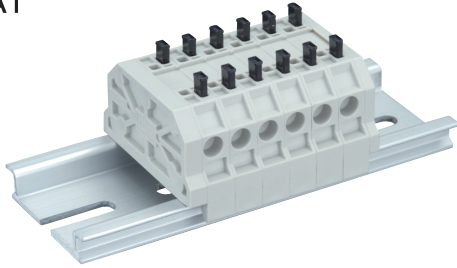

※OCN-3000N, OCN-3002N, OCN-3100N and OCN-3102N can be combined.
 ※Another sales (Din-rail)


Specifications

Electrical Rating	600V, 20A (CUL=600V, 10A)
Insulation Resistance	DC5000V, 1000MΩ
Withstanding Voltage	AC2500V
Cable Range	Str AWG24~14 Sol AWG24~12
Storage Temperature Rating	-40°C~+80°C
Usage Temperature Rating	-40°C~+80°C



※Gray(Standard Color), 4 colors combination(Black, Red & Blue)
 More than 21P are special order products.

Ordering Lot


Part Name	Base	Side Plate (Unit)		Stopper (height 13mm=OTY-13, 18mm=OTY-18)	
		OCN-3100N-A	OCN-3100N-B	OTY-13	OTY-18
Order Name	OCN-3100N	OCN-3100N-A	OCN-3100N-B	OTY-13	OTY-18
Piece	50	5	5	50	50



Pitch (terminal to terminal)
: 6.5mm



The button can be selected high or low.
 Low button adds "S" to the model name
 of articles.



Composition

No.	Part Name	Materials	Flame Class	Treatment	Remarks
①	Base	PA66	94V-0		
②	Push Button	Polycarbonate	94V-0		
③	Terminal	Brass		Sn	
④	Spring	SUS301			
⑤	Marking Strip				Optional
⑥	DIN rail (35mm)	Aluminum			Optional

Side Plate

