
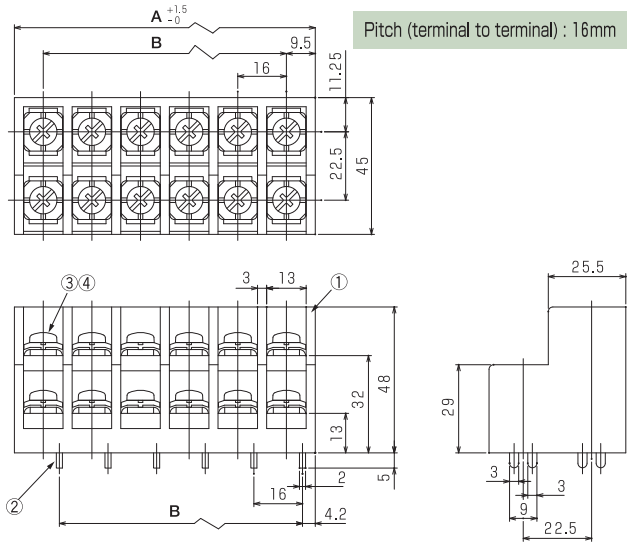


# OTB-4000N

UL US (FW2)

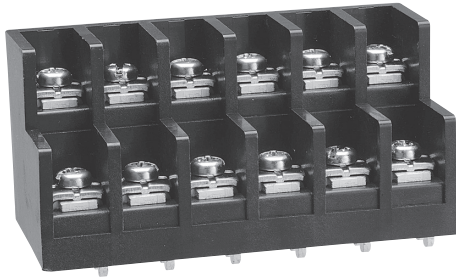

## Specifications

Electrical Rating	600V, 85A
Insulation Resistance	DC500V, 1000MΩ
Withstanding Voltage	AC2500V
Storage Temperature Rating	-40°C~+90°C
Usage Temperature Rating	-40°C~+90°C

## Measurements List of A & B ( P : Number of terminals )

P	4	6	8	10	12	14	16	18	20	22	24	26
A	35	51	67	83	99	115	131	147	163	179	195	211
B	16	32	48	64	80	96	112	128	144	160	176	192

## Composition

No.	Part Name	Materials	Flame Class	Treatment	Remarks
①	Base	PBT	94V-0		Black
②	Terminal	Copper		Sn	
③	Screw (M5×12L)	Steel		Ni	
④	Hexagon Nut	Steel		Cr <sup>3+</sup> Zn	

