

OTB-701-B




OTB-701-B



※Cover attachment available

Pitch (terminal to terminal) : 7.62mm

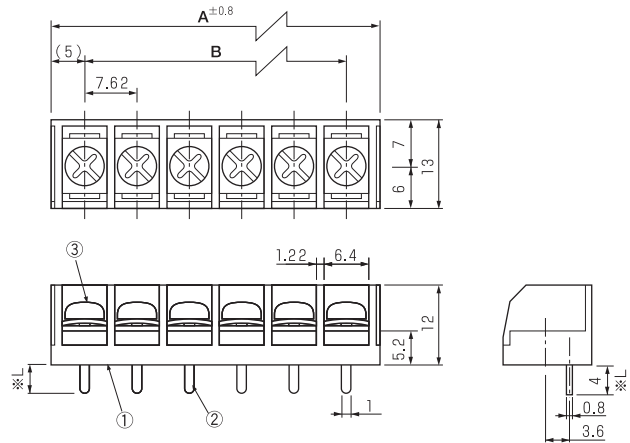

Specifications

Electrical Rating	250V, 10A
Insulation Resistance	DC500V, 1000MΩ
Withstanding Voltage	AC2500V
Storage Temperature Rating	-40°C~+90°C
Usage Temperature Rating	-40°C~+90°C

※ L	4L (Standard)	10L	13L	15.4L
-----	---------------	-----	-----	-------

Composition

No.	Part Name	Materials	Flame Class	Treatment	Remarks
①	Base	PBT	94V-0		Black
②	Terminal	Brass		Sn	
③	Screw (M3×6L)	Steel		Ni	F Series

Measurements List of A & B (P : Number of terminals)

	P	2	3	4	5	6	7	8	9	10	11	12	13
B Type	A	17.62	25.24	32.86	40.48	48.10	55.72	63.34	70.96	78.58	86.20	93.82	
	B	7.62	15.24	22.86	30.48	38.10	45.72	53.34	60.96	68.58	76.20	83.82	
M Type	A	32.86	40.48	48.10	55.72	63.34	70.96	78.58	86.20	93.82			
	B	22.86	30.48	38.10	45.72	53.34	60.96	68.58	76.20	83.82			