
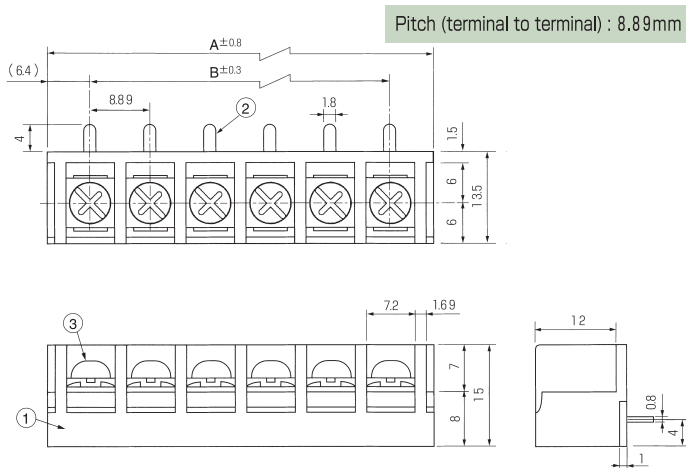


# OTB-712-B

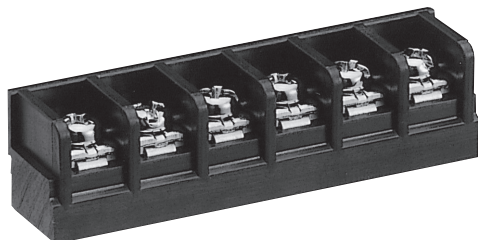

## Specifications

Electrical Rating	250V, 18A
Insulation Resistance	DC500V, 1000MΩ
Withstanding Voltage	AC2500V
Storage Temperature Rating	-40°C~+90°C
Usage Temperature Rating	-40°C~+90°C

## Composition

No.	Part Name	Materials	Flame Class	Treatment	Remarks
①	Base	PBT	94V-0		Black
②	Terminal	Brass		Sn	
③	Screw (M3.5x8L)	Steel		Ni	F Series

## Measurements List of A & B ( P : Number of terminals ) Special Order 11P~15P

P	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
A		21.69	30.58	39.47	48.36	57.25	66.14	75.03	83.92	92.81	101.70	110.59	119.48	128.37	137.26
B		8.89	17.78	26.67	35.56	44.45	53.34	62.23	71.12	80.01	88.90	97.79	106.68	115.57	124.46