



# OTB-761N-BL

UL US (FW2) TÜV

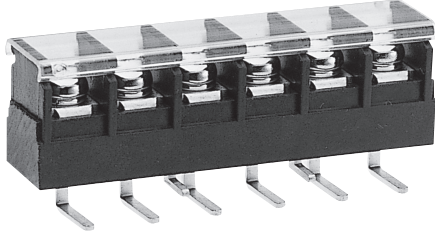

※Instantly Detachable Cover (Optional)

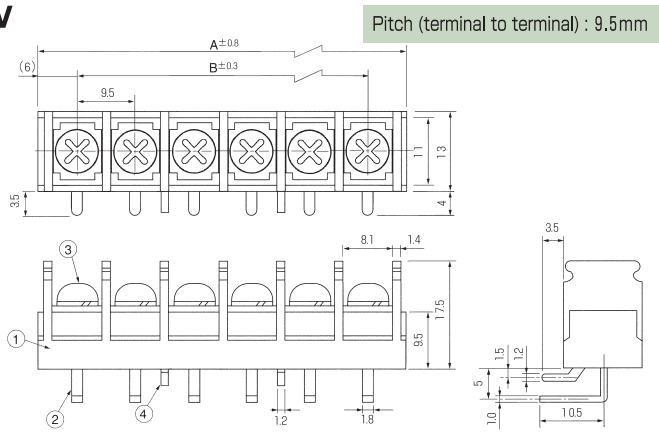

**Location of mounting pins**

2P~5P : On the insides of the outer-most terminal pins located at both ends.  
6P~ : As shown in the drawing.

**Specifications**

Electrical Rating	300V, 20A
Insulation Resistance	DC500V, 1000MΩ
Withstanding Voltage	AC2500V
Storage Temperature Rating	-40°C~+90°C
Usage Temperature Rating	-40°C~+90°C

**Composition**

Placement of mounting pins and quantity can be adjusted.

No.	Part Name	Materials	Flame Class	Treatment	Remarks
①	Base	PBT	94V-0		Black
②	Terminal	Brass		Sn	
③	Screw(M3.5) (M4)	Steel		Cr <sup>3+</sup> Zn / Ni	P and F Series
④	Mounting Pin	Brass		Sn	

**Measurements List of A & B ( P : Number of terminals )**

P	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
A		21.5	31.0	40.5	50.0	59.5	69.0	78.5	88.0	97.5	107.0	116.5	126.0	135.5	145.0
B		9.5	19.0	28.5	38.0	47.5	57.0	66.5	76.0	85.5	95.0	104.5	114.0	123.5	133.0