


OTB-900-B


us (FW2)

Pitch (terminal to terminal) : 11mm

PAT

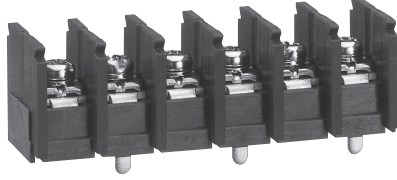

※ Instantly Detachable Cover (Optional)

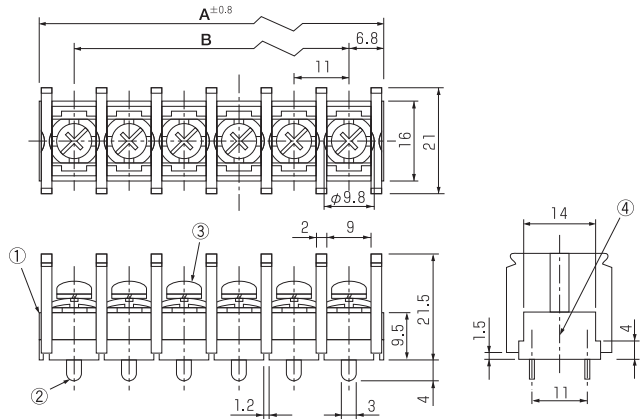

Specifications

Electrical Rating	600V, 35A For Ring-Mold (43A)
Insulation Resistance	DC500V, 1000MΩ
Withstanding Voltage	AC2500V
Storage Temperature Rating	-40°C~+90°C
Usage Temperature Rating	-40°C~+90°C

Composition

No.	Part Name	Materials	Flame Class	Treatment	Remarks
①	Base	PBT	94V-0		Black
②	Terminal	Copper		Sn	
③	Screw (M4×10L)	Steel		Ni	F Series
④	Hexagon Nut (M4)	Steel		Cr ³⁺ +Zn	

Measurements List of A & B (P : Number of terminals) Special Order 13P~15P

P	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
A		24.6	35.6	46.6	57.6	68.6	79.6	90.6	101.6	112.6	123.6	134.6	145.6	156.6	167.6
B		11	22	33	44	55	66	77	88	99	110	121	132	143	154

