
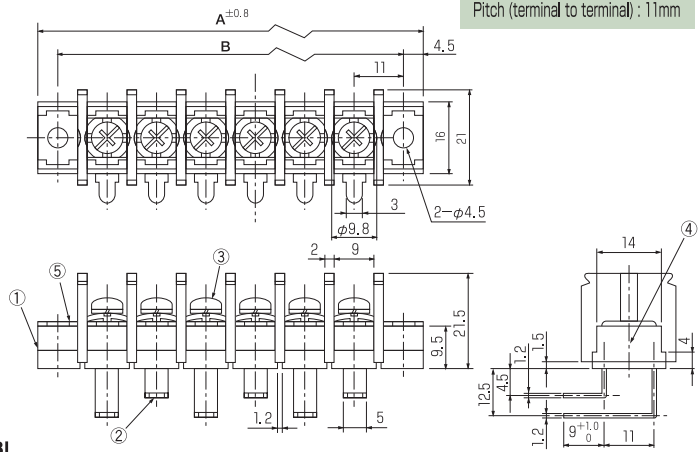


# OTB-900N-ML/BL

PAT

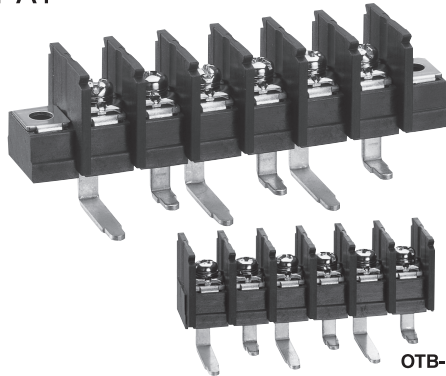

### Specifications


Electrical Rating	600V, 40A
Insulation Resistance	DC500V, 1000MΩ
Withstanding Voltage	AC2500V
Storage Temperature Rating	-40°C~+90°C
Usage Temperature Rating	-40°C~+90°C

### Composition

No.	Part Name	Materials	Flame Class	Treatment	Remarks
①	Base	PBT	94V-0		Black
②	Terminal	Copper		Sn	
③	Screw (M4×10L)	Steel		Ni	F Series
④	Hexagon Nut (M4)	Steel		Cr <sup>3+</sup> Zn	
⑤	Mounting Plate	Brass		Ni	

### Measurements List of A & B ( P : Number of terminals ) Special Order 13P~15P

	P	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
ML Type	A		42	53	64	75	86	97	108	119	130	141	152	163	174	185
	B		33	44	55	66	77	88	99	110	121	132	143	154	165	176
BL Type	A		24.6	35.6	46.6	57.6	68.6	79.6	90.6	101.6	112.6	123.6	134.6	145.6	156.6	167.6
	B		11	22	33	44	55	66	77	88	99	110	121	132	143	154



Schematic chart for proper fitting holes.