



OULP-936N-B

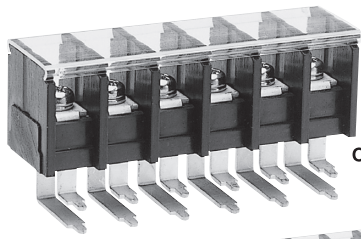


OULP-936N-B



OULP-936N-M

※Instantly Detachable Cover (Optional)

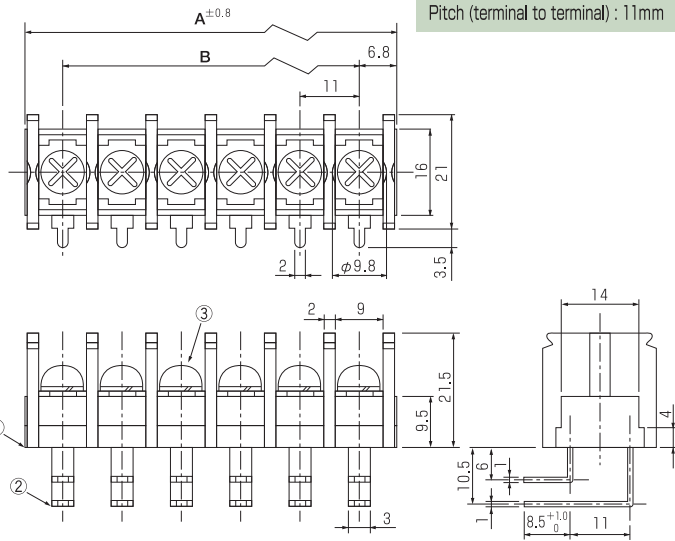

Specifications

Electrical Rating	300V, 40A
Insulation Resistance	DC1000V, 1000MΩ
Withstanding Voltage	AC2500V
Storage Temperature Rating	-40°C~+90°C
Usage Temperature Rating	-40°C~+90°C

Composition

No.	Part Name	Materials	Flame Class	Treatment	Remarks
①	Base	PBT	94V-0		Black
②	Terminal	Copper		Sn	
③	Screw (M4×8L)	Brass		Ni	P Series

Measurements List of A & B (P : Number of terminals)

	P	2	3	4	5	6	7	8	9	10	11
B Type	A	24.6	35.6	46.6	57.6	68.6	79.6	90.6	101.6	112.6	123.6
	B	11	22	33	44	55	66	77	88	99	110
M Type	A	42	53	64	75	86	97	108	119	130	141
	B	33	44	55	66	77	88	99	110	121	132

