


OK-020



UL (FW2) TÜV

OK-020N


cULus (FW2)

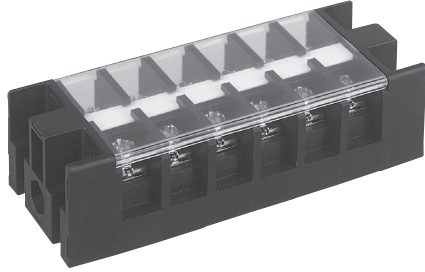

Pitch (terminal to terminal) : 11mm

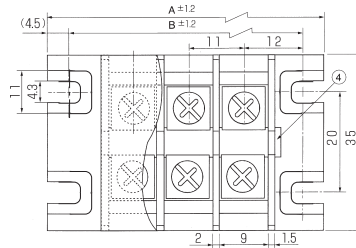

OK-020-□P-FC
FINGER PROTECTING COVER
(3~7Pole)

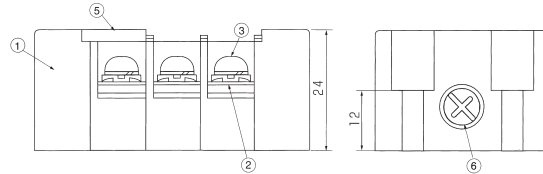

Specifications

Electrical Rating	600V, 30A OK-020N 300V, 15A
Insulation Resistance	DC500V, 1000MΩ
Withstanding Voltage	AC2500V
Storage Temperature Rating	-40°C~+90°C
Usage Temperature Rating	-40°C~+90°C

Composition

No.	Part Name	Materials	Flame Class	Treatment	Remarks
①	Base	PBT	94V-0		Black
②	Terminal	Brass		Ni	
③	Screw (M4×8L)	Steel		Ni	F Series
④	Marking Strip				
⑤	Cover	Polycarbonate	94V-0		Transparency
⑥	Joint Shaft	Steel		Ni	

Measurements List of A & B (P : Number of terminals) Special Order 13P~25P

P	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30
A	33	44	55	66	77	88	99	110	121	132	143	154	165	176	187	198	209	220	231	242	253	264	275	286	308					
B	24	35	46	57	68	79	90	101	112	123	134	145	156	167	178	189	200	211	222	233	244	255	266	277	288					