

OK-050

c **UL** us (FW2)

PAT



※Marking Strip (Optional)


※Do not use the screw for the earth except the purpose as the earth.

Specifications

Electrical Rating	600V, 60A
Insulation Resistance	DC500V, 1000MΩ
Withstanding Voltage	AC2500V
Storage Temperature Rating	-40°C~+90°C
Usage Temperature Rating	-40°C~+90°C

Measurements List of A & B (P : Number of terminals)

P	2	3	4	5	6	7	8	9	10
A		80	95.5	111	126.5		157.5		188.5
B		62	77.5	93	108.5		139.5		170.5

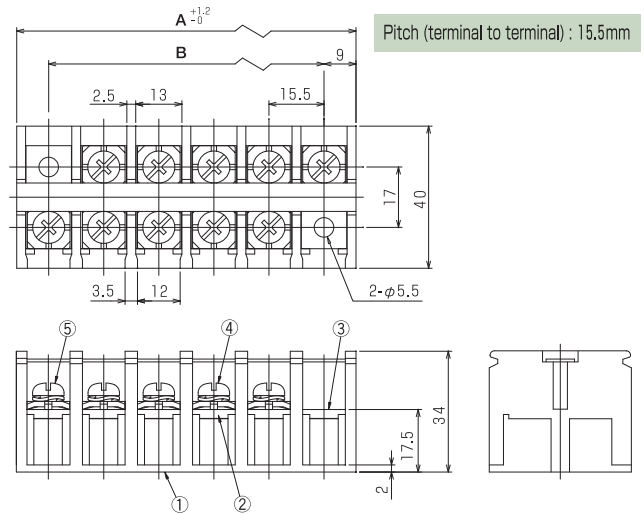

Composition

No.	Part Name	Materials	Flame Class	Treatment	Remarks
①	Base	PBT	94V-0		Black
②	Terminal A	Brass		Ni	
③	Terminal B	Brass		Ni	
④	Screw (M5×12L)	Steel		Cr ³⁺ Zn	F Series
⑤	Screw for earth (M5×12L)	Steel		Cr ³⁺ Zn	Green
⑥	Cover	Polycarbonate	94V-0		Transparency