
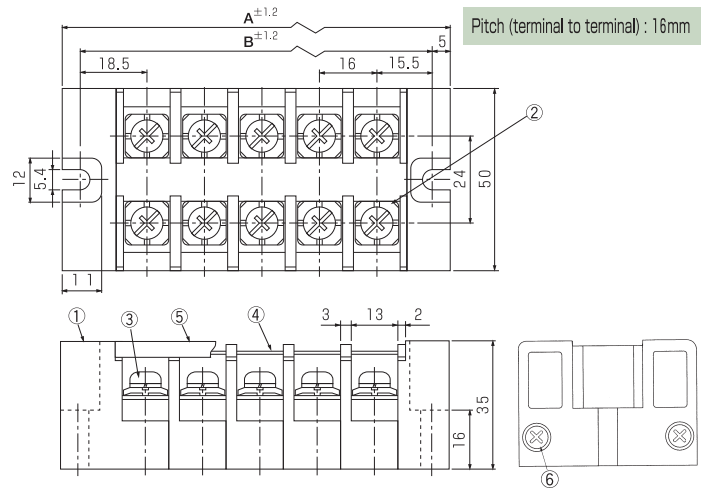


# OK-060

**FW2** TÜV

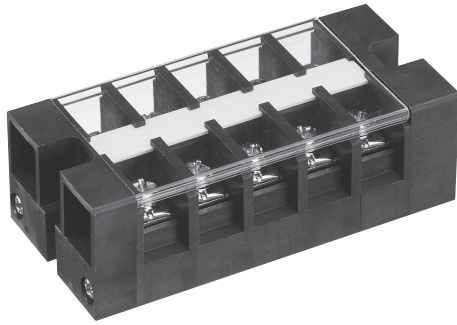

### Specifications

Electrical Rating	FW1 : 600V, 85A / FW2 : 600V, 60A
Insulation Resistance	DC500V, 1000MΩ
Withstanding Voltage	AC2500V
Storage Temperature Rating	-40°C~+90°C
Usage Temperature Rating	-40°C~+90°C

### Composition

No.	Part Name	Materials	Flame Class	Treatment	Remarks
①	Base	PBT	94V-0		Black
②	Terminal	Brass		Ni	
③	Screw (M5×12L)	Steel		Ni	F Series
④	Marking Strip				
⑤	Cover	Polycarbonate	94V-0		Transparency
⑥	Joint Shaft (M4)	Steel		Ni	

### Measurements List of A & B ( P : Number of terminals )

P	1	2	3	4	5	6	7	8	9	10	11	12
A	44	60	76	92	108	124	140	156	172	188	204	220
B	34	50	66	82	98	114	130	146	162	178	194	210