



OK-10



OK-10F With Cover and Marking Strip



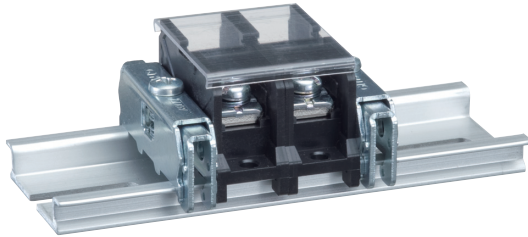


OK-10R Cover and Marking Strip (Optional)





Pitch (terminal to terminal) : 14.5mm

[fix-type] OK-10F

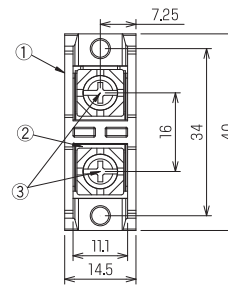

[DIN rail] OK-10R



DIN rail

Composition

No.	Part Name	Materials	Flame Class	Treatment	Remarks
①	Base	PBT	94V-0		
②	Terminal	Brass		Ni	
③	Screw M4x10L	Steel		Cr ³⁺ Zn	F Series
④	Cover	Polycarbonate	94V-0		
⑤	Marking Strip				

Specifications

Electrical Rating	600V, 35A
Insulation Resistance	DC500V, 1000MΩ
Withstanding Voltage	AC2500V
Storage Temperature Rating	-40°C~+90°C
Usage Temperature Rating	-40°C~+90°C