
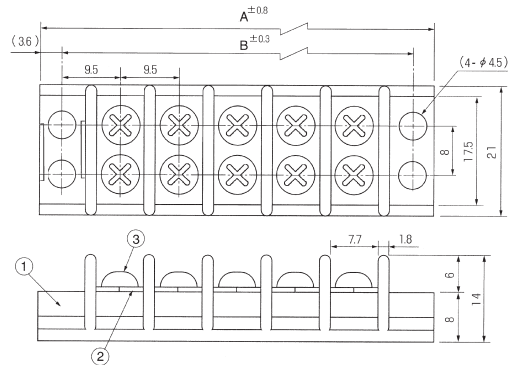


# OTB-551

UL US (FW2) TÜV

Pitch (terminal to terminal) : 9.5mm

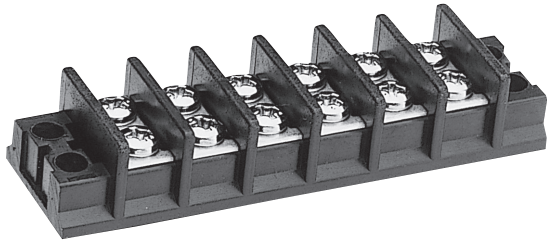

※Cover attachment available

## Specifications

Electrical Rating	250V, 10A
Insulation Resistance	DC500V, 1000MΩ
Withstanding Voltage	AC2500V
Storage Temperature Rating	-40°C~+90°C
Usage Temperature Rating	-40°C~+90°C

## Composition

No.	Part Name	Materials	Flame Class	Treatment	Remarks
①	Base	PBT	94V-0		Black
②	Terminal	Brass		Sn	
③	Screw (M3×6L)	Brass		Ni	B Series

## Measurements List of A & B ( P : Number of terminals )

P	1	2	3	4	5	6	7	8	9	10
A		35.7	45.2	54.7	64.2	73.7	83.2	92.7	102.2	111.7
B		28.5	38.0	47.5	57.0	66.5	76.0	85.5	95.0	104.5