
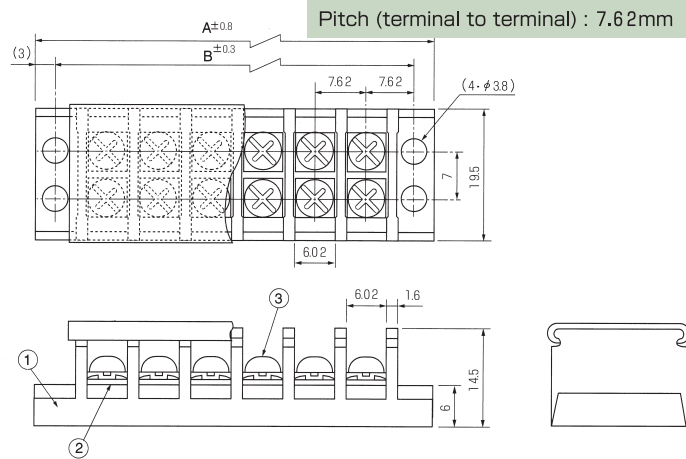


# OTB-576

c  us (FW2) TÜV

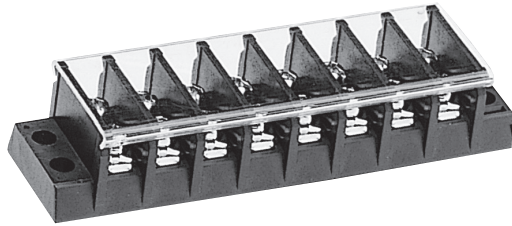

※Instantly Detachable Cover (Optional)

## Specifications

Electrical Rating	300V, 10A
Insulation Resistance	DC500V, 1000M $\Omega$
Withstanding Voltage	AC2500V
Storage Temperature Rating	-40°C~+90°C
Usage Temperature Rating	-40°C~+90°C

## Composition

No.	Part Name	Materials	Flame Class	Treatment	Remarks
①	Base	PBT	94V-0		Black
②	Terminal	Brass		Ni	
③	Screw (M3 $\times$ 6L)	Steel		Ni	F Series

## Measurements List of A & B ( P : Number of terminals )

P	1	2	3	4	5	6	7	8	9	10	11	12
A		28.86	36.48	44.10	51.72	59.34	66.96	74.58	82.20	89.82	97.44	105.06
B		22.86	30.48	38.10	45.72	53.34	60.96	68.58	76.20	83.82	91.44	99.06