




OTB-812

c  us (FW2)

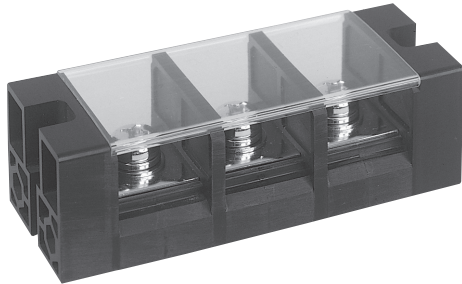

Pitch (terminal to terminal) : 30mm

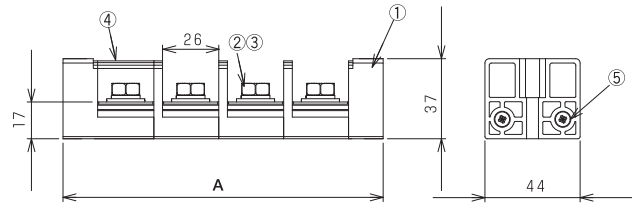

Specifications

Electrical Rating	600V, 230A
Insulation Resistance	DC500V, 1000MΩ
Withstanding Voltage	AC2500V
Storage Temperature Rating	-40°C~+90°C
Usage Temperature Rating	-40°C~+90°C

Composition

No.	Part Name	Materials	Flame Class	Treatment	Remarks
①	Base	PBT	94V-0		Black
②	Terminal	Brass		Ni	
③	Screw (M4×10)	Steel		Cr ³⁺ Zn	F Series
④	Cover	Polycarbonate	94V-0		Transparency
⑤	Joint Shaft	Steel		Ni	

Measurements List of A & B (P : Number of terminals)

P	1	2	3	4	5	6	7	8	9	10	11	12	13
A	58	88	118	148	178	208	238	268	298	328	358	388	
B	46	76	106	136	166	196	226	256	286	316	346	376	