



OTB-490


c  us (FW2)

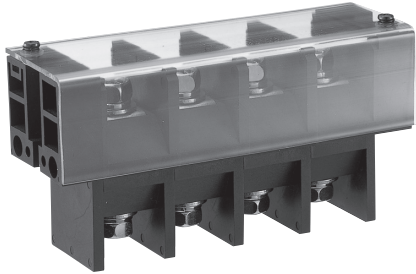

※LC Cover (Optional)

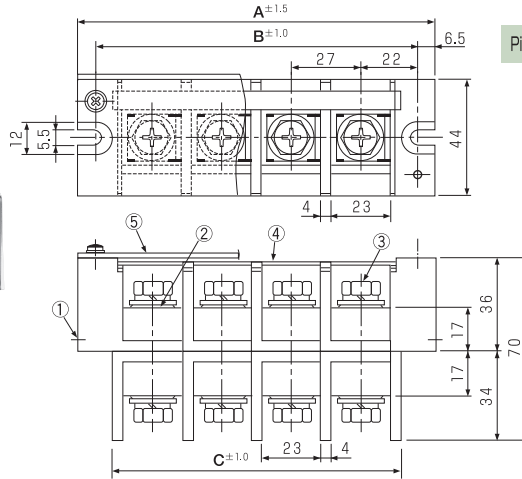

Pitch (terminal to terminal) : 27mm

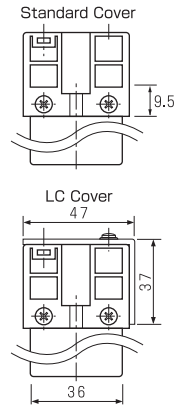

Specifications

Electrical Rating	600V, 170A
Insulation Resistance	DC500V, 1000MΩ
Withstanding Voltage	AC2500V
Storage Temperature Rating	-40°C~+90°C
Usage Temperature Rating	-40°C~+90°C

Composition

No.	Part Name	Materials	Flame Class	Treatment	Remarks
①	Base	PBT	94V-0		Black
②	Terminal	Copper		Ni	
③	Bolt (M8×16L)	Steel		Cr ³⁺ Zn	PW, SW
④	Marking Strip				Optional
⑤	Cover	C	Polycarbonate	94V-0	
		LC	Polycarbonate	94V-0	

Measurements List of A, B & C (P : Number of terminals) Special Order 13P~15P

P	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
A	57	84	111	138	165	192	219	246	273	300	327	354	381	408	435
B	44	71	98	125	152	179	206	233	260	287	314	341	368	395	422
C	31	58	85	112	139	166	193	220	247	274	301	328	355	382	409

