
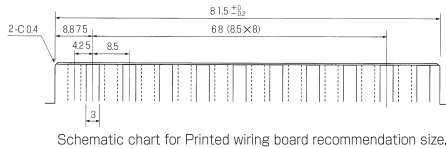
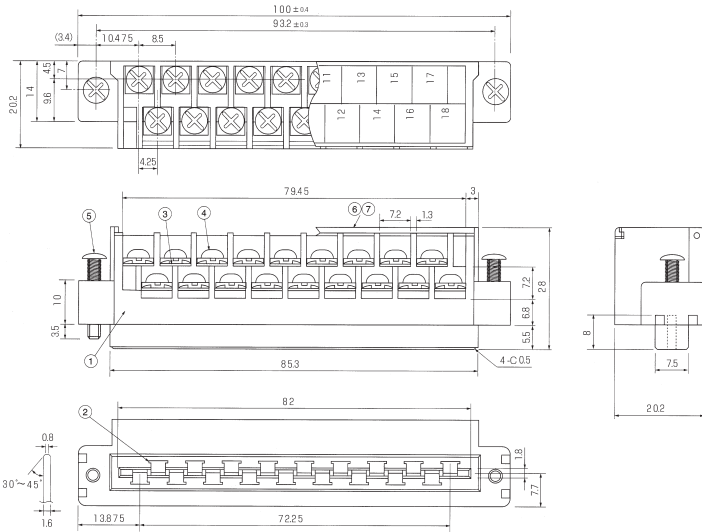


OULK-852R-18P

FW2

Pitch (terminal to terminal) : 8.5mm

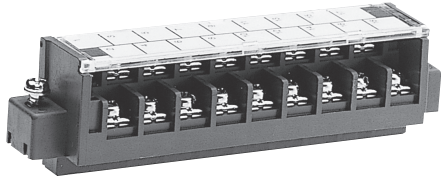

Specifications

Electrical Rating	250V, 8A
Insulation Resistance	DC500V, 1000MΩ
Contact Resistance	15mΩ
Withstanding Voltage	AC2000V
Storage Temperature Rating	-40°C~+90°C
Usage Temperature Rating	-40°C~+90°C

Composition

No.	Part Name	Materials	Flame Class	Treatment	Remarks
①	Base	PBT	94V-0		Black
②	Contact	Phosphor Bronze		Au	
③	Screw (M3.5×7L)	Steel		Ni	F Series
④	Attachment Screw	Steel		Ni	± P Series
⑤	Cover	Polycarbonate	94V-0		Transparency
⑥	Marking Strip	Paper			