



FH-013



FH-013


Ordering lot : 50pcs.

※With Cover (FH-013C)



Proper fitting fuse $\phi 6.4 \times 30\text{mm}$

FH-013C



Specifications

Electrical Rating	250V, 10A
Insulation Resistance	DC500V, 1000M Ω
Withstanding Voltage	AC2000V
Usage Temperature Rating	-40°C~+90°C

Composition

No.	Part Name	Materials	Flame Class	Treatment	Remarks
①	Base	PBT	94V-0		Black
②	Spring to hold fuse	Phosphor Bronze			

FH-014/015



Low Price

Ordering lot : 100pcs.

FH-014

FH-015





For PCB

For Soldering



※Cover (Optional)

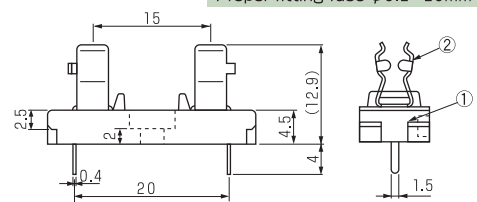

Proper fitting fuse $\phi 5.2 \times 20\text{mm}$

Specifications

Electrical Rating	125V, 10A
Insulation Resistance	DC500V, 1000M Ω
Withstanding Voltage	AC2000V
Usage Temperature Rating	-40°C~+90°C

Composition


No.	Part Name	Materials	Flame Class	Treatment	Remarks
①	Base	PBT	94V-0		Black
②	Spring to hold fuse	Phosphor Bronze			

GF205B




Low Price

Ordering lot : 100pcs.



Proper fitting fuse $\phi 5.2 \times 20\text{mm}$



Specifications

Electrical Rating	250V, 10A
Insulation Resistance	DC500V, 1000M Ω
Withstanding Voltage	AC2000V
Usage Temperature Rating	-25°C~+80°C

Composition

No.	Part Name	Materials	Flame Class	Treatment	Remarks
①	Base	PA66			
②	Spring to hold fuse	Brass		Sn	